

FE-W

6MP 360° Panoramic Indoor Fisheye Camera with Smart Detection, Night Vision & Two-Way Audio

- 6MP Super HD
- 360° Panoramic View
- 5/2.4GHz WiFi




Specifications

Power	
DC Power	DC 12.0V 1A, <12W
Size & Weight	
Dimensions	Φ126×49.2mm
Weight	293g
Video & Audio	
Image Sensor	1/2.5" CMOS sensor
Video Resolution	2560X2560 (6.5Megapixels) @20FPS
Lens	f=1.98mm F=2.0 IR CUT
Video Compression	H.265
Field of View	180°(H), 180°(V), 180°(D)
Day & Night	IR-cut filter & auto-switching
Infrared Night Vision	8 Meters (3pcs/850nm)
Audio	Two-Way Audio
Interface	

Power	DC power port
System	Reset Button
Ethernet	One 10M/100Mbps RJ45
Storage	microSD card slot (Max. 512GB); Reolink NVR
Audio	Built-in microphone and speaker
Wi-Fi	
Wireless Standard	IEEE 802.11a/b/g/n
Operating Frequency	2.4 GHz/5 GHz
Wireless Security	WPA-PSK/WPA2-PSK
Software Features	
Frame Rate	2-25FPS
Code Rate	Main stream: 4096-8192Kbps; default: 5120kbps; Sub stream: 64-512Kbps; default: 256kbps
Browser Supported	Edge, Chrome, Firefox, Safari
OS Supported	PC: Windows, Mac OS; Smartphone: iOS, Android
Smart Alarm	Motion detection, AI detection
Record Mode	Motion recording (default); schedule recording; 24/7 recording
Protocols & Standards	HTTPS, SSL, TCP/IP, UDP, HTTP, IPV4, UPnP, RTSP, RTMP, SMTP, NTP, DHCP, DNS, DDNS, FTP, P2P
Maximal User Access	20 Users (1 admin account & 19 user accounts); Up to 12 simultaneous video streams (10 substreams & 2 mainstreams)
Work with	Google assistant
Working Environment	
Temperature	-10°C to +55°C (14°F to 131°F)
Humidity	10% – 90%
Warranty	
Limited Warranty	2-year limited warranty. For support, visit https://support.reolink.com/hc/en-us/

Gallery & Specs

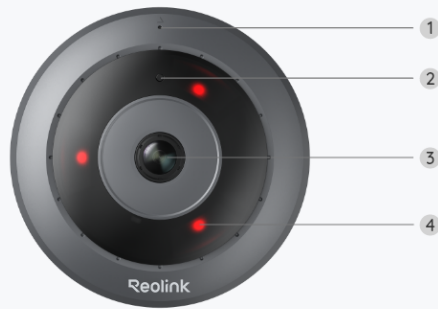

- 1. Microphone
- 2. Daylight Sensor
- 3. Lens
- 4. IR LED



- 1. Reset Button
- 2. microSD Card Slot
- 3. Mount Base



- 1. Power
- 2. Network
- 3. Waterproof Lid